

SG3K-D/SG5K-D

Residential Single Phase Inverter

Premium



HIGH YIELD

- Higher yield with Max. efficiency 98.4 %, European efficiency 98.0 %
- 12.5 A MPPT current, and compatible with bifacial modules
- Flexible PV string configurations, DC/AC ratio up to 1.4

SMART MANAGEMENT

- 24H real-time loads monitoring
- Easy local and online monitoring via App or Web


SAFE AND DURABLE

- Quick Arc Fault Circuit Interrupter
- Built-in Type II DC&AC surge protection device
- Built-in certified PV isolator


EASY AND USER FRIENDLY

- 11.5 kg compact design, plug and play installation
- Fast commissioning via App

CIRCUIT DIAGRAM

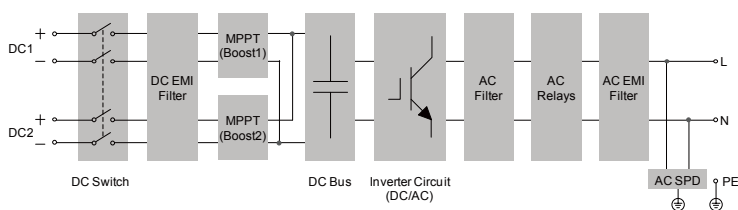

EFFICIENCY CURVE

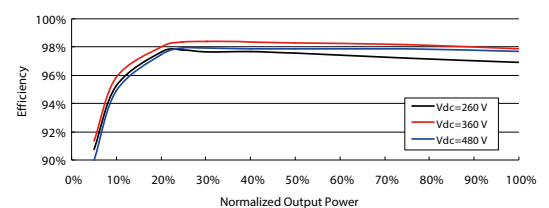

Type designation	SG3K-D	SG5K-D
Input (DC)		
Max. PV input voltage	600 V	
Min. PV input voltage / Startup voltage	90 V / 120 V	
Nominal input voltage	360 V	
MPP voltage range	90 V – 560 V	
MPP voltage range for nominal power	160 V – 480 V	240 V – 480 V
No. of MPPTs	2	
Max. number of PV strings per MPPT	1	
Max. PV input current	25 A (12.5 A / 12.5 A)	
Max. PV short-circuit current	30 A (15 A / 15 A)	
Output Side Data		
AC output power	3000 VA	4999 VA
Max. AC output current	13.7 A	21.7 A
Nominal AC voltage	230 Vac	
AC voltage range	180 Vac – 276 Vac	
Nominal grid frequency	50 Hz / 60 Hz	
Grid frequency range	45 Hz – 55 Hz / 55 Hz – 65 Hz	
Total harmonic distortion (THD)	< 3 % (of nominal power)	
Power factor	> 0.99 / 0.8 leading – 0.8 lagging	
Feed-in phases / Connection phases	1 / 1	
Efficiency		
Max. efficiency	98.4 %	
Max. European efficiency	97.7 %	98.0 %
Protection		
PV reverse connection protection	Yes	
AC short circuit protection	Yes	
Leakage current protection	Yes	
Grid monitoring	Yes	
PV string current monitoring	Yes	
DC switch	Yes (meet AS60947.3:2018)	
AFCI	Yes	
Overvoltage protection	DC Type II / AC Type II	
General Data		
Dimensions (W*H*D)	360*390*133 mm	
Weight	11.5 kg	
Isolation method	Transformerless	
Ingress protection rating	IP65	
Power loss in night mode	< 3 W	
Operating ambient temperature	-25 °C to 60 °C (>45 °C derating)	
Allowable relative humidity	0 – 100 %	
Cooling method	Natural cooling	
Max. operating altitude	4000 m (> 2000 m derating)	
Display / Communication	LCD / WLAN	
PV connection type	MC4 (max. 6 mm ²)	
AC connection type	Plug and play connector (max. 6 mm ²)	
Certification	IEC62109-1, IEC62109-2, IEC62116, IEC61727, EN 61000-6-2, EN 61000-6-3, AS / NZS 4777.2	

Residential Single Phase Inverter



HIGH YIELD

- Higher yield with max. efficiency 98.5 %, European efficiency 98.0 %
- Flexible PV string configurations, DC/AC ratio up to 1.3



SAFE AND DURABLE

- Built-in surge arresters and residual current protection
- High anti-corrosion with aluminum alloy die casting



SMART MANAGEMENT


- Easy local and online monitoring via App or Web
- Export power control with smart energy meter




EASY AND USER FRIENDLY

- 15.5 kg compact design, plug and play installation
- Fast commissioning via LCD

CIRCUIT DIAGRAM

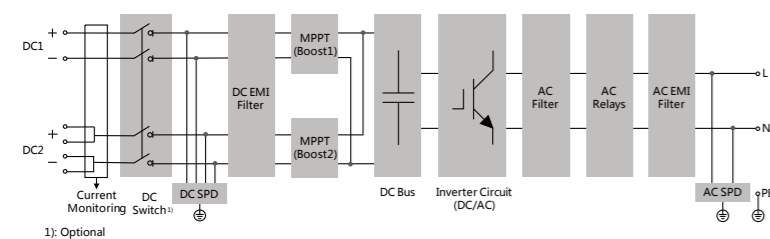

EFFICIENCY CURVE

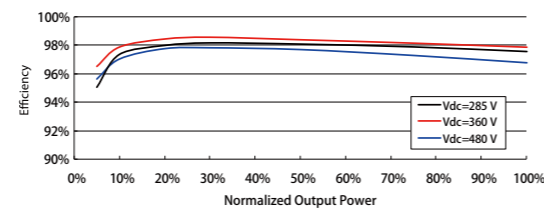

Type designation	SG8K-D
Input (DC)	
Max. PV input voltage	600 V
Min PV input voltage / Startup voltage	90 V / 120 V
Nominal input voltage	360 V
MPP voltage range	90 V – 540 V
MPP voltage range for nominal power	275 V – 480 V
No. of MPPTs	2
Max. number of PV strings per MPPT	1 / 2
Max. PV input current	12.5 A / 25 A
Max. current for input connector	15 A / 30 A
Max. PV short-circuit current	15 A / 30 A
Output (AC)	
AC output power	8000 VA
Max. AC output current	34.8 A
Nominal AC voltage	230 Vac
AC voltage range	180 Vac – 276 Vac (this may vary with grid standards)
Nominal grid frequency	50Hz / 60Hz
Grid frequency range	45 Hz – 55 Hz / 55 Hz – 65 Hz (this may vary with grid standards)
Total harmonic distortion (THD)	< 3 % (of nominal power)
DC current injection	< 0.5 % (of nominal current)
Power factor	> 0.99 / 0.8 leading - 0.8 lagging
Feed-in phases / Connection phases	1 / 1
Efficiency	
Max. efficiency / European efficiency	98.5 % / 98.0 %
Protection	
PV reverse connection protection	Yes
AC short circuit protection	Yes
Leakage current protection	Yes
Grid monitoring	Yes
PV string current monitoring	Yes
DC switch	Optional
Overvoltage protection	DC Type II / AC Type II
General Data	
Dimensions (W*H*D)	360*390*148 mm
Weight	15.5 kg
Isolation method	Transformerless
Ingress protection rating	IP65
Power loss in night mode	< 1 W
Operating ambient temperature	-25 °C to 60 °C (>45 °C derating)
Allowable relative humidity (non-condensing)	0 – 100 %
Cooling method	Natural cooling
Max. operating altitude	4000 m (> 2000 m derating)
Display / Communication	LCD / WiFi
PV connection type	MC4 (Max. 6 mm ²)
AC connection type	Plug and play connector (max. 6 mm ²)
Compliance	IEC62109-1, IEC62109-2, IEC62116, IEC61727, EN 61000-6-2, EN 61000-6-3, AS4777.2
Grid support	Active & reactive power control, power ramp rate control
Type designation	SG8K-D-10